



### ISM 250-32S

250 l spiral mixer, stainless steel safety cover, with two speed motor. Oil-less kneading system. Stainless steel food contact parts for hygiene. Two side returnable bowl.

### ISM 250-32S CR

250 l spiral mixer, stainless steel safety cover, with two speed motor. Oil-less kneading system. Stainless steel food contact parts for hygiene. Two side returnable bowl. Stainless steel body

## Main Features



- Dirmak equipments are designed for long-term usage under heavy duty conditions. Mixer is equipped with Stainless steel food contact parts for hygiene and mixing bowl for 250 l.
- Waterproof button control panel
- Two Speed
- Two digital timers
- Reverse bowl
- Automatic / Manuel operating system
- Strong pulley-belt system
- Silent operation
- Maximum capacity (Flour, with %60 hydration) 150 kg for bread dough.
- Safety cover in stainless steel
- Safety device will automatically stop the machine when the cover opens.
- Equipped with wheels and machine levelling feet.

## Specification

ISM Series spiral mixers provide very intensive, quick, homogeneous and dead spot free mixing . Spiral mixer yields very quick preparation without warming and tiring products such as dough, mincemeat, etc. The dough will result soft, well aired and easy to remove. AISI 304 stainless steel bowl, AISI 304 stainless steel spiral tool and breaking bar provides excellent mixing

## Construction

- Body painted with corrosion resistant electrostatical paint or AISI 304 Stainless steel option.
- AISI 304 Stainless steel bowl—250 l capacity.
- Asynchronous motor with high start-up torque.
- Water protected spiral system (IP54 electrical controls, IP 32 overall machine)
- Power :  
5,5-7,5 + 0,55 kW for ISM 250-32S and ISM 250-32S CR

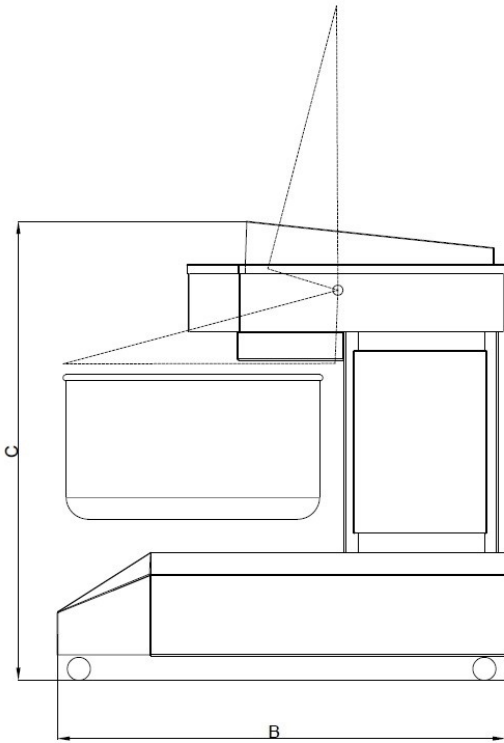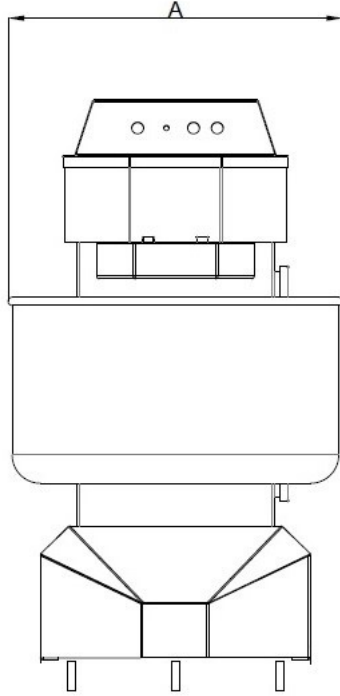

## Electric

### Supply Voltage :

ISM 250-32S 380-415 V/3P/50-60Hz

ISM 250-32S CR 380-415 V/3P/50-60Hz

### Electrical Power Max. :

ISM 250-32S CR 5,5-7,5 + 0,55 kW

## Capacity

Flour : 100 Kg / Cycle

Dough : 150 Kg / Cycle

Capacity : 250 liter

Bowl Diameter: 850 mm

## Key Information

Width (A) : 900 mm

Depth (B) : 1500 mm

Height (C) : 1600 mm

Shipping Weight : 600 Kg

